


DOCKSIDE™ PREFILTER

Assembly and Operation Instructions



PARTS

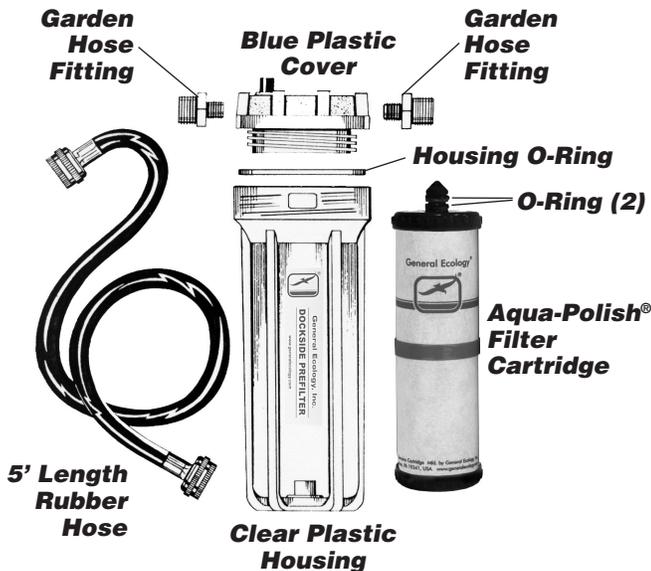

To Store:



- Close water source spigot. Open hose to release pressure.
- Detach housing from hoses.
- Open housing and drain off excess water.
- If the prefilter is not going to be used for a period of time, (i.e., winterized) the cartridge should be removed, allowed to air dry, and then stored in a clear plastic bag.

Helpful Hint:

After a long period of non-use, the cartridge should be flushed from both directions with a solution of 1/8 oz. (1 teaspoon-no more) of household bleach per 1 gallon of water. This will oxidize surface molds, etc. and help extend cartridge life. **Do not over chlorinate** as this will reduce the effectiveness of the chemical removal capabilities of the Aqua-Polish Cartridge.


ASSEMBLY

- 1 Remove cover. Insert Aqua-Polish Filter Cartridge into clear housing base.

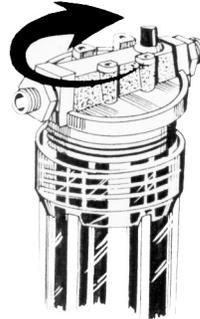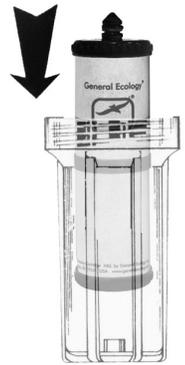

- 2 Screw housing cover closed. Filter cartridge will self center and seal in place as cover screws down. Hand tighten to a snug fit.

- 3 Attach one end of 5' rubber hose to fresh water source spigot and other end to Inlet port fitting on housing cover.

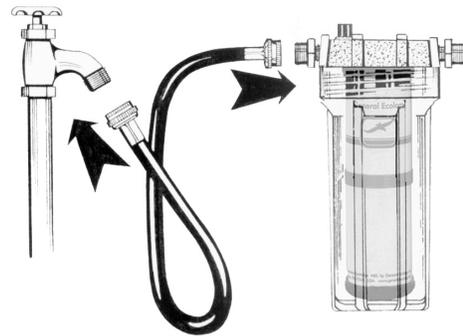

- 4 Attach any standard 5/8" garden hose to outlet port fitting. Slowly open water valve allowing prefilter to fill before opening valve to full pressure. Trapped air should be vented by pressing down the red air pressure release valve.



General Ecology, Inc.

151 Sheree Blvd., Exton, PA 19341

tel: 610-363-7900 • fax: 610-363-0412

www.generalecology.com • info@generalecology.com

the pure science of safe water™

General Ecology, Inc.

