

Filtro depurazione acqua a squadra con flange PN6/PN16

Vertical intake water strainer with PN6/PN16 flanges

Filtro omologato RINA MAC
RINA MAC certificate



Tabella flange a pag. 195
Flange table on page 195

* Con flangia PN16
With flange PN16

1283	10500	13700	16400	23800	32600	45000	63000	95000
Weight (gr)*	3600	4900	5800	7600	10300	14200	19900	30000
3283								
Weight (gr)*								
D	145	168	185	211	241	284	337	406
H	275	324	347	375	453	505	570	660
H1	170	200	218	250	300	342	370	430
L1	110	125	135	155	175	200	232	278
L	200	227	245	278	314	362	421	501
DN	50	65	80	100	125	150	200	250


Bronzo
Bronze

3283



Alluminio anodizzato nero
Solo su richiesta speciale
Black anodized aluminium
Upon special request only

Diagramma portate - perdite di carico
Flow rate - loss of pressure diagram

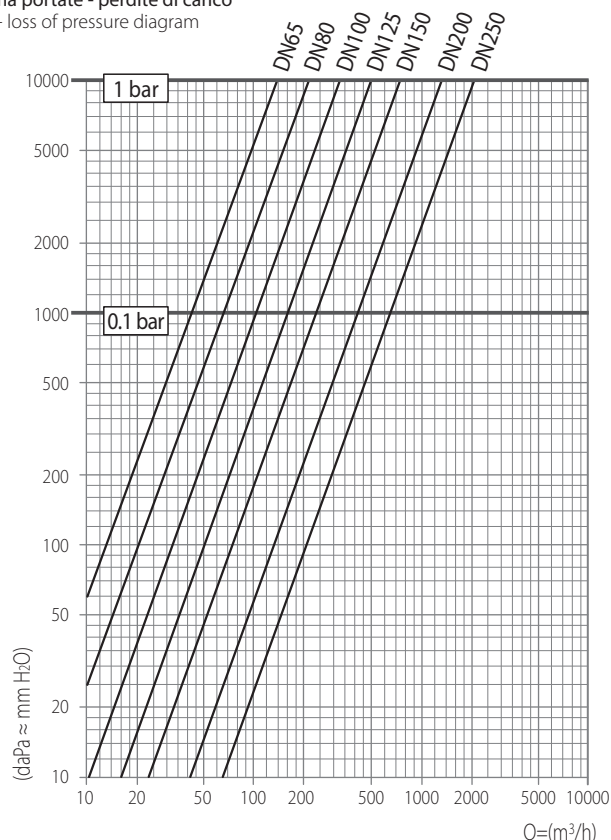

Corpo in bronzo / Alluminio anodizzato nero
Bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L
AISI 316L stainless steel inside filter

Coperchio in bronzo / Alluminio anodizzato nero
Bronze / Black anodized aluminium cover

Guarnizioni in neoprene
Neoprene o-ring

DN	0.1 bar	1 bar
65	43500	139000
80	66800	210000
100	104000	328000
125	160000	507000
150	231000	730000
200	410000	1298000
250	641000	2028000

Portate di acqua attraverso il filtro pulito - lt/h
Flow-rate capacity through the clean filter - lt/h